


PSM-28T

Power Supply Operation Manual

Features:

- This equipment is specially designed for electrified locks and access control systems.
- Two separate outputs are available to connect electrified locks and access control systems.
- Time is adjustable from 0 to 45 seconds to meet different requirements.
- The unit may connect to request-to-exit button, allowing for quick egress.
- Installation is quick and easy.
- Battery protection: overdischarge, short circuit, polarity reverse

Dimensions:

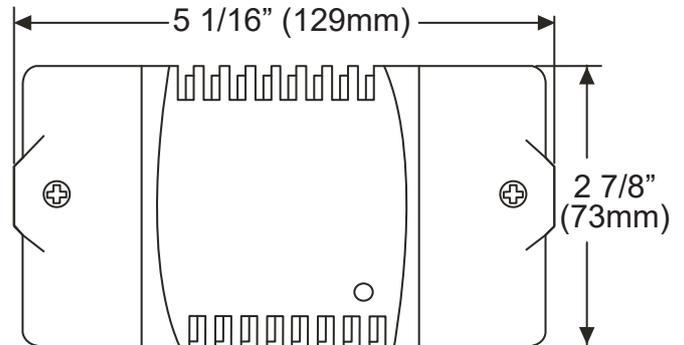

Specifications:

Input power	100-240 VAC, 50/60 Hz
Output voltage 1	12V/13.8V 1.5A Max. (Timed) (for both fail-safe and fail-secure electrified locks)
Output voltage 2	12V/13.8V 1A Max.
Battery Charger	12V/13.8V 0.3A Max.
Adjustable timer	0~45 seconds
Weight	0.22 Kg
Dimensions	5 1/16" x 2 7/8" x 2" (129 (L) x 73(W) x 50(D) mm)

Wiring Diagram:

