



GD970/GD990-USP 電磁門扣安裝說明書

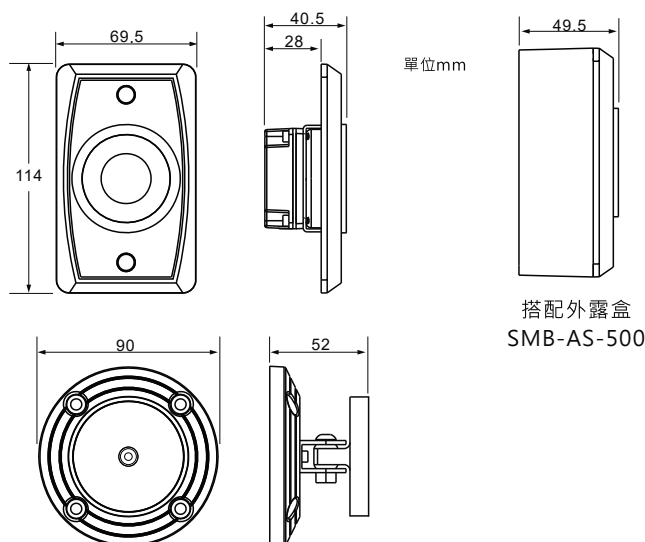

GD970-USP (埋入/外露式)


- 工作電壓: 12/24VDC; 110~220VAC
- 消耗電流: 130mA/12VDC
145mA/24VDC
70mA/110VAC
50mA/220VAC
- 拉力值: 12VDC (32.9 lbs)
24VDC (32.9lbs)
110VAC (38.8lbs)
220VAC (38.8lbs)
- 防殘磁功能
- 鋁面板 · ANSI電器盒規格
- 可選配SMB-AS-500外露盒外露式安裝
- 顏色: 銀色
- 為了收納線材方便，預埋盒需用加深款(深度5CM)

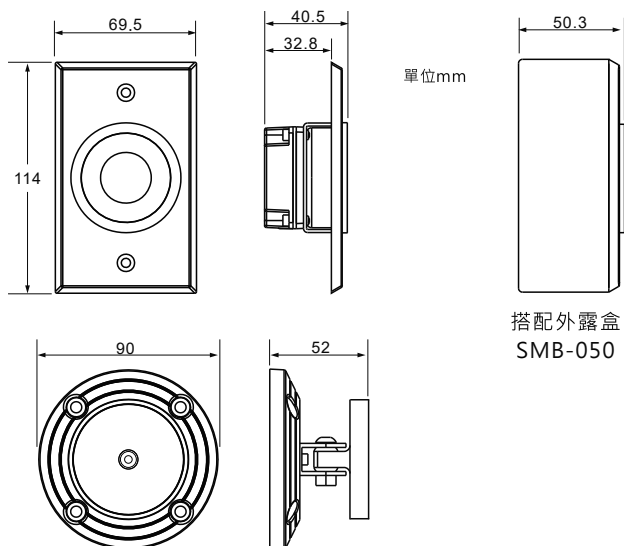


GD990-USP (埋入/外露式)

- 工作電壓: 12/24VDC; 110~220VAC
- 消耗電流: 130mA/12VDC
145mA/24VDC
70mA/110VAC
50mA/220VAC
- 拉力值: 12VDC (32.9 lbs)
24VDC (32.9lbs)
110VAC (38.8lbs)
220VAC (38.8lbs)
- 防殘磁功能
- 不銹鋼面板 · ANSI電器盒規格
- 不銹鋼外露盒
- 為了收納線材方便，預埋盒需用加深款(深度5CM)


接點說明

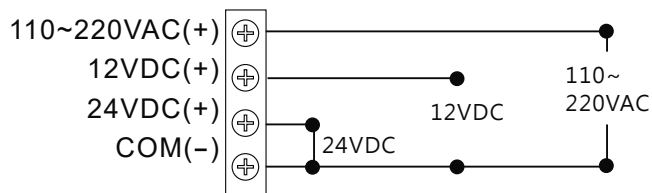


安裝圖示

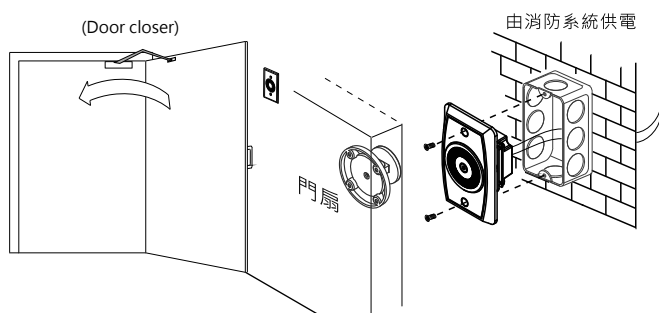

增高柱安裝方式(選配)

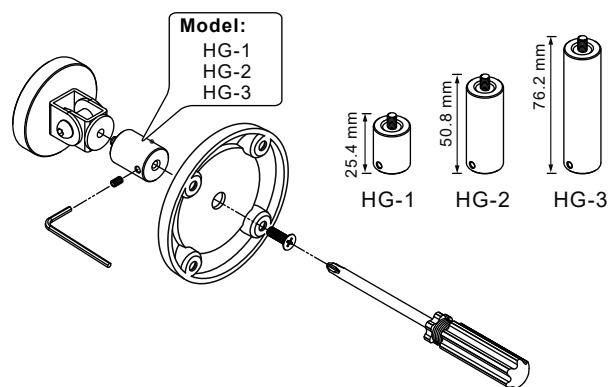

注意事項

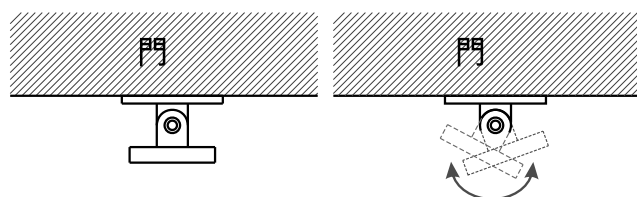

吸附板能微微轉動，讓吸附板和電磁鎖吸附面能緊密結合，而無間隙吸力才能達到最高。